

DOVETAIL FORMLOK® DECK-SLAB WEDGE-NUT HANGING SOLUTIONS

HANG YOUR MECHANICAL SYSTEMS FROM DOVETAIL FORMLOK COMPOSITE DECK-SLABS

DOVETAIL FORMLOK WEDGE-NUTS

- IAPMO UES ER-423
- UL Listed

WEDGE-NUT HANGING LOAD¹⁻⁶ 145 pcf NWC or ≥110 pcf LWC

$f'_c = 2500 \text{ psi (min.)}$



Profile	Part Number	Connection Strength (lbs)		
		Nominal P_n	ASD P_n / Ω	LRFD ϕP_n
2.0D FormLok	2.0D-WN-3/8NC	3828	1392	2297
	2.0D-WN-1/2NC			
3.5D FormLok	3.5D-WN-3/8NC	5490	1996	3294
	3.5D-WN-1/2NC			



MAXIMUM SPRINKLER PIPE DIAMETER



Profile	Part Number	NPS ⁷	UL No.
		Diameter (in.)	
2.0D FormLok	2.0D-WN-3/8NC	4	EX27777
	2.0D-WN-1/2NC	6	
3.5D FormLok	3.5D-WN-3/8NC	4	EX27777
	3.5D-WN-1/2NC	8	

Notes:

1. The concentrated hanging load shall not exceed the bending strength and vertical shear strength of the Dovetail FormLok Composite Deck-Slab.
2. Hanging load shall not exceed the strength of the threaded rod or bolt provided by others.
3. The hanging load shall be applied not more than 5 degrees from normal to the plane of the deck.
4. The allowable strength, P_n / Ω , shall be equal to or greater than the governing load combination for Allowable Stress Design in the IBC or ASCE/SEI 7.
5. The factored strength, ϕP_n , shall be equal to or greater than the governing load combination for Load and Resistance Factor Design in the IBC or ASCE/SEI 7.
6. Safety and resistance factors included in the table are $\Omega = 2.75$ (ASD) and $\phi = 0.60$ (LRFD) respectively.
7. NPS = Nominal Pipe Size

DOVETAIL FORMLOK® DECK-SLAB WEDGE-NUT HANGING SOLUTIONS

DOVETAIL FORMLOK WEDGE-NUT INSTALLATION

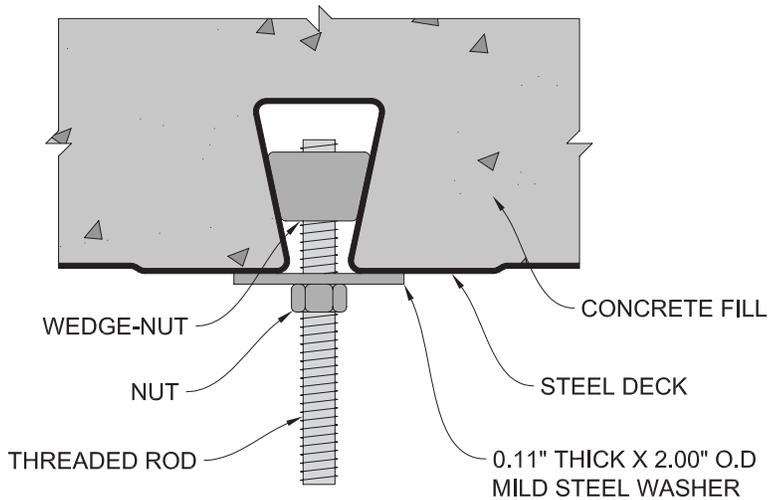


Figure 1

1. Deck ribs shall be free of foreign material to ensure the wedge-nut bears directly on the steel deck.
2. Insert wedge-nut and rotate to seat the surface against the webs of the steel deck as shown in Figure 1.
3. Position wedge-nut in the center of the rib with the threaded rod or bolt perpendicular to the bottom surface of the steel deck as show in Figure 1.
4. Tighten the $\frac{3}{8}$ " threaded rod or bolt 1 to $1\frac{1}{2}$ turns beyond snug tight.
5. Tighten the $\frac{1}{2}$ " threaded rod or bolt $\frac{1}{2}$ to 1 turn beyond snug tight.

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.